



Circulation Fan

CF20

Performance Curve

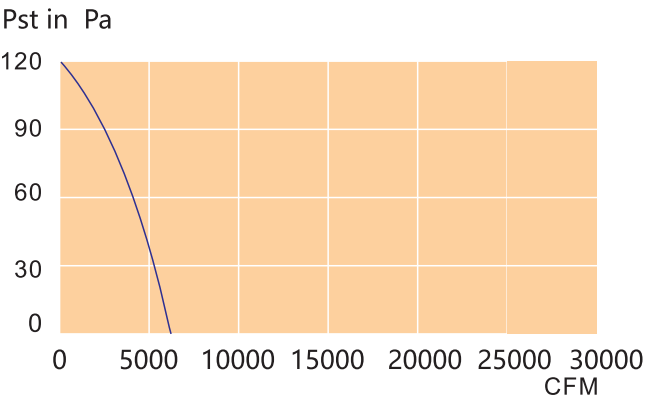

CF20 Outside dimension drawing

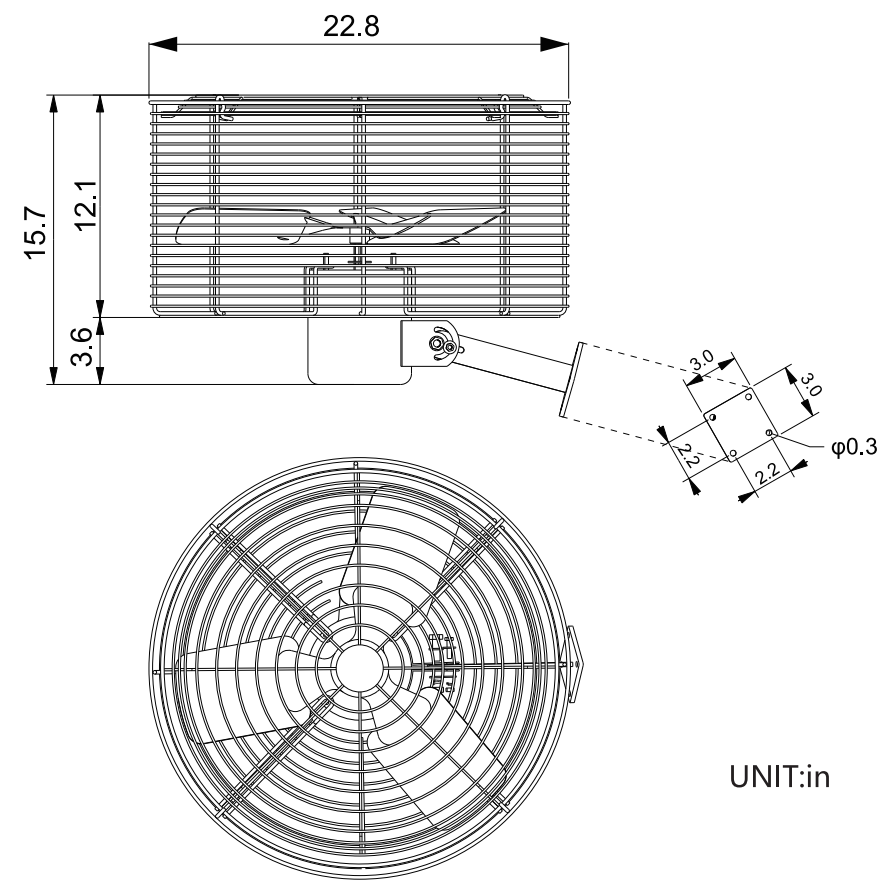

Onsite application



FEATURES:

- Provides 5750CFM airflow for balanced air circulation in mid-sized cultivation areas
- Directional airflow encourages plant movement and consistent light coverage
- Cantilevered brackets offer simplified installation, maintenance, and repositioning
- Snap-in grille design allows for easy disassembly and cleaning
- Double ball bearing system provides quiet performance and long-term durability

Structural Parameters	CF20-120	CF20-240	CF20-277
Factory ID No.	32100120	32100121	32100122
Diameter	20"		
Product Shipping Dimensions	23.7"*23.7"*16.6"		25.6"*25.6"*19.7"
Guard Spacing(inches)	1/2 - 1 UL507		
Maximum RPM	1725 Rpm		

Air Flow Parameters	CF20-120	CF20-120	CF20-277
CFM (free air)	5750 CFM		
CFM Range (free air)	5250 - 10500 CFM		

Electrical Parameters	CF20-120	CF20-120	CF20-277
Voltage	120 VAC	240 VAC	277 VAC
Frequency	60Hz	60Hz	60Hz
Power	9/16hp	5/8hp	9/16hp
Nameplate Amps	3.66A	1.93A	1.71A

Attachment Parameters	CF20-120	CF20-120	CF20-277
Product Net Weight	35.5lbs	35 lbs	34.8lbs
Cord Length	60in (5 feet)	60in (5 feet)	60in (5 feet)